

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

10/529496
PCT/SE 03/01514

REC'D 14 OCT 2003

WIPO

PCT

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Göteborg University Surgical Science AB, Göteborg
Applicant (s) SE

(21) Patentansökningsnummer 0202864-5
Patent application number

(86) Ingivningsdatum 2002-09-30
Date of filing

Stockholm, 2003-10-02

För Patent- och registreringsverket
For the Patent- and Registration Office

Sonia André
Sonia André

Avgift
Fee

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

PATENT- OCH
REGISTRERINGSVERKET
SWEDEN

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 668 02 86
08-668 02 86

AWAPATENT AB

Kontor/Handläggare
Göteborg/Jenny Widahl

PRV 02 03 04
GÖTEBORG UNIVERSITY
SURGICAL SCIENCE AB

Ansökningsnr

Vår referens
SE-2026248

1

DEVICE AND METHOD FOR GENERATING A VIRTUAL ANATOMIC ENVI-
RONMENT

Technical field of the invention

5 This invention relates to a method for generating a virtual anatomic environment for use in minimally invasive surgery simulation. The invention further relates to such a computer-based minimal-invasive surgery simulation system.

Background of the invention

10

In modern surgery, minimal invasive techniques are used in more and more applications. The development of technology within this relatively new field advances quickly, which results in great training requirements for
15 surgeons. One way of rendering the training more effective is to use computer simulations. Known techniques for providing a credible simulation are very complicated and expensive with respect to computer utility in the form of processor and memory. Moreover, the result is not sufficient to provide a realistic simulation environment. The
20 visual properties that the anatomy exhibits in reality are difficult and time-consuming to recreate in a simulation.

By means of modern computer engineering, it is possible to provide realistic training situations in a virtual environment created by a computer program. In the computer program, a three-dimensional model of the object which the simulation concerns is provided. The user is provided with a projection thereof which should correspond to the picture information which in a real situation is caught by a camera. Within the field of laparo-
25
30

scopy, a camera is used to supply picture information from the patient to the surgeon. The display screen shows the picture that the camera catches of the inside of, for example, the abdominal cavity. All the instruments and the anatomy with which the surgeon works are reproduced by means of the camera and the display screen. The surgeon uses the information on the display screen to control and operate his or her instruments and carry out the procedures which are required to perform the surgical operation. Since the minimal invasive techniques supply information to the surgeon by means of a display screen, the three-dimensional reality is reduced to two dimensions on the display screen. The picture therefore lacks, among other things, the information as to depth that exists in reality. The surgeon has to make up for this loss of information by studying lighting conditions, colours, etc.

This means that all visual information, such as instrument and anatomy, is drawn by the computer. However, many complicated processes within the field of surgery are expensive, if not impossible, to fully simulate in a computer. For example, a large part of the picture information that the surgeon uses in real life, for example light effects and anatomic structures, factors such as breathing and beat of the pulse, which are present in the real situation are difficult to recreate realistically in the computer. Moreover, due to different biological anatomic variations occurring in humans, it is difficult to fully simulate a situation confronting a surgeon when he is to perform an operation. Some efforts have been made to generate simulation systems providing random variations of certain elements, such as the thickness of an artery, in order to provide a more realistic simulation environment. However, such random variations are not enough to fully prepare a surgeon on what to expect when performing minimal-invasive surgery. Moreover, the more alterations of this type that are made during simulation, during simulation, the more computer

during simulation, the more computer capacity is needed, making such systems expensive. Hence, a method for providing a more realistic simulation result, at the same time saving computer capacity, is desired, in order to
 5 provide a realistic, cost-efficient system for minimal-invasive surgery simulation.

Summary of the invention

10 Hence, an object of the present invention is to provide a method and system for use in minimally invasive surgery simulation system, in order to generate a realistic simulation environment, and which wholly or partly solve the above-mentioned problems.

15 These and other objects are at least partly achieved by a method for generating a virtual anatomic environment for use in minimally invasive surgery simulation, comprising the steps of: incorporating a main virtual anatomic environment, selecting a local anatomic environment
 20 from a predefined library comprising a set of two or more simulated local anatomic environments, and including the selected local anatomic environment in said main anatomic environment to form a total virtual anatomic environment. This enables a total virtual anatomic environment, in
 25 which simulation may be performed, to be built-up by separately modelled components. By using different building components, as stored in the library, different total virtual anatomic environments may be generated, without modelling the entire environment from the beginning. This
 30 also enables that the manufacturer may have a total control over what variations are stored in the library, and hence what total virtual anatomic environments that may be generated, as opposed to randomise alterations of separate components of the environment.

35 Preferably, said set of local anatomic environments is arranged to represent a set of anatomic variations for a critical internal area, occurring in living beings.

Thereby, a straight-forward method of achieving a simulation system, covering anatomic variations, such as different configurations of arteries and ducts around an organ, or different organ shapes (and so on) is realised.

5 Moreover, the step of selecting a local anatomic environment from a predefined library comprising two or more of simulated local anatomic environments suitably further comprises the step of randomly selecting one of the local anatomic environments in the library. Thereby,
10 a user of the simulation system does not know in advance what anatomic environment will be presented to him. This provides a realistic situation for the user, and gives the user the opportunity to learn to tell the difference between different anatomic environments, that may look
15 similar at a first glance. Preferably, the probability of randomly selecting a certain local anatomic environment essentially corresponds with the degree of occurrence of that local anatomic environment in living beings, in order to further provide a realistic simulation environment.
20 ment.

 According to a preferred embodiment of the invention, the main virtual anatomic environment is arranged to model an internal cavity of a human, such as an abdominal cavity or a chest cavity, while the set of local
25 anatomic environments is arranged to simulate different arrangements of arteries, veins and ducts around an organ arranged in said internal cavity, such as a gall bladder or a heart.

 According to another embodiment, the inventive
30 method further comprises the step of selecting, by means of user selection, a certain one of said local anatomic environments from said library and including it into said main virtual environment. This enables a user to practice surgery in a certain selected environment, for example to
35 improve his or her skills on that certain environment, or to prepare for a real surgery of a patient exhibiting a similar environment.

The above and other objects are at least partly achieved by a device for generating a virtual anatomic environment for use in minimally invasive surgery simulation, comprising a modelling device for providing a main virtual anatomic environment, a library, comprising a set of two or more predefined local anatomic environments, and means for incorporating one of the local anatomic environments of the library into the main virtual anatomic environment, together forming a total virtual anatomic environment. Such a device enables a total virtual anatomic environment, in which simulation may be performed, to be built-up by separately modelled components. By using different building components, as stored in the library, different total virtual anatomic environments may be generated, without modelling the entire environment from the beginning. This also enables that the manufacturer may have a total control over what variations is stored in the library, and hence what total virtual anatomic environments that may be generated, as opposed to randomise alterations of separate components of the environment. This may be advantageous from an educational point of view.

Preferably, the device further comprises a selection device for selecting one of said local anatomic environments from said library to be included in said main anatomic environment, and suitably, the selection device is arranged to randomly select one of said local anatomic environments from said library to be included in said main anatomic environment. Thereby, a user of the simulation system does not know what anatomic environment will be presented to him. This provides a realistic situation for the user, and gives the user the opportunity to learn to tell the difference between different anatomic environments, that may look similar at a first glance. Preferably, the selection device is arranged to randomly select one of said local anatomic environments in such a way that the probability of choosing a certain local

anatomic environment essentially corresponds with the degree of occurrence of that local anatomic environment in human beings, further improving the realism of the simulated surgery.

5 According to a preferred embodiment of the invention, the main virtual anatomic environment is arranged to model an internal cavity of a human, such as an abdominal cavity or a chest cavity, while the set of local anatomic environments is arranged to simulate different
10 arrangements of arteries, veins and ducts around an organ arranged in said internal cavity, such as a gall bladder or a heart.

Also, the above and other objects of the invention are achieved by a computer-based minimal-invasive surgery
15 simulation system, comprising a device for generating a virtual anatomic environment as described above.

Brief description of the drawings

20 The invention will hereinafter be described in closer detail by means of presently preferred embodiments thereof, with reference to the accompanying drawings.

Fig 1 is a schematic view of the basic components of a simulation system in which the present invention may be
25 implemented.

Fig 2 is a block diagram of a simulation system according to an embodiment of the invention.

Fig 3 is a block diagram describing the inventive device for generating a virtual anatomic environment for
30 use in a minimally invasive surgery simulation system as shown in fig 1 or 2.

Description of preferred embodiments of the invention

35 Hereinafter, reference will be made in detail to a preferred embodiment of this invention, which is illustrated in the accompanying drawings.

As stated above this invention relates to the field of computer-based minimal-invasive surgery simulation systems, and a schematic drawing of the basic hard-ware components of such a system, in which the present invention may be incorporated, is disclosed in fig 1. Such a system essentially comprises a processing unit 10 for simulating a minimal-invasive surgery situation, a surgical tool input device 11, for inputting information regarding movements etc of a surgical tool to be manoeuvred by a user to the processing unit 10, and a display device 12 for displaying the simulated surgery procedure in order to visualise the simulated surgery situation for the user. The processing unit may, for example, comprise a personal computer which is preferably equipped with a graphics card having 3D-circuits. Moreover, the surgical tool input device 11 may or may not be provided with a system for tactile feedback to the user of the system.

The processing unit 10, as disclosed in fig 1, will hereinafter be described in closer detail with reference to fig 2. The processing unit essentially comprises a total virtual anatomic environment modeller 14, for providing a model of a total virtual anatomic environment 2 to an interaction simulation device 13. The interaction simulation device 13 is also arranged to receive information regarding movements etc. of the surgical tool input device 11. Based on information from the total virtual anatomic environment modeller 14 and the surgical tool input device 11, the surgical procedure is simulated by said interaction simulation device 13, and the resulting simulation is outputted to the display device 12, whereby it is displayed for a user.

This invention is focused on the generation of the total virtual anatomic environment 4, generated by said total virtual anatomic environment modeller 14. According to the invention, the processing unit 10 further comprises a main virtual anatomic environment modeller 15, for providing a model of a main virtual anatomic environ-

ment 1, as well as a local anatomic environment library 3, for providing a model of a local virtual anatomic environment 2. The main virtual anatomic environment modeller 15 and the local anatomic environment library 3 are both connected with the total virtual anatomic environment modeller 14.

The main virtual anatomic environment modeller 15 is arranged to model and provide a model of a main virtual anatomic environment 1 to the total virtual anatomic environment modeller 14, while the local anatomic environment library 3 is arranged to store a two or more modelled local anatomic environments 2, and providing one of those to the total virtual anatomic environment modeller 14. Together, the main virtual anatomic environment 1 and the local anatomic environment 2 may form a total anatomic environment, in which simulation may be performed.

The term "local virtual anatomic environment" as used herein shall be understood as a 3-D model of a local internal area of a living being, that is critical during the surgery procedure that is to be simulated. For example, the local virtual anatomic environment may comprise a and organ 6, such as a gall bladder or a heart and the veins, arteries and ducts 7 surrounding the organ 6. However, the invention may be used for simulation of virtually any internal area, and hence, the invention is not limited to the above examples.

The term "local virtual anatomic environment library" as used herein shall be understood as a library containing two or more local virtual anatomic environments as defined above, said environments forming a set of environments. The set of environments may for example comprise a plurality of environments each modelling a biological variation in the selected local internal area. As an example, environmental models of different configurations of the veins, arteries and ducts surrounding the gall bladder, that are present in human beings may be stored in the library, as is disclosed in fig 3. In the

present example, in order to cover the biological variety to an extent of approximately 99% of all humans, the set should contain about 16 different local virtual anatomic environments. Another example, for which the invention
 5 may be used, is different configurations of veins, arteries and ducts surrounding the heart.

The term "main virtual anatomic environment" as used herein shall be understood as a 3-D model of an internal area of a living being, essentially surrounding the local
 10 internal area described above. An example of such an internal area is the abdominal cavity (for the example with a gall bladder) or the chest cavity (for the example with the heart). The components included in the local virtual anatomic environment are excluded in the main virtual
 15 anatomic environment. For example, if the local virtual anatomic environment contains the gall bladder and the surrounding arteries and ducts, the main virtual anatomic environment does not include those components, but only connecting arteries, and ducts and so on. Alternatively,
 20 the local virtual anatomic environment may only comprise the arteries and ducts surrounding the gall bladder, while the gall bladder itself is included in the main virtual anatomic environment.

25 The device further comprises a selection device 9, for selecting one of the local anatomic environments 2 stored in the local anatomic environment library 3. This selection device may be realised in various different ways.

30 According to a first example, the selection device 9 may be provided with an input device (not shown), so that a user actively may select what local anatomic environment should be selected and included into the main virtual anatomic environment. This may for example be re-
 35 alised through a computer input interface, using a mouse or the like. The above enables training in a user-selected environment, for improving the user's skills re-

garding a certain biological variation, as defined by the
 selected local anatomic environment 2. Thereby, a user
 (surgeon) may train on a surgery procedure of a patient,
 exhibiting a certain biological variation, before per-
 5 forming the surgery. Moreover, the user may specifically
 train on procedures in local anatomic environments which
 they are less familiar with, thereby improving the over-
 all quality of the surgery training.

According to a second example, the selection device
 10 9 may be arranged as a random selection device, for ran-
 domly selecting one of the local anatomic environments 2,
 stored in the local anatomic environment library 3. This
 provides a realistic training situation, since, in most
 cases, a surgeon is not aware of what biological varia-
 15 tion a patient exhibits until the surgery procedure has
 started. It is then of great importance to quickly be
 able to recognize the different biological variations, in
 order to perform a correct procedure. Hence, a selection
 device according to this example facilitates such train-
 20 ing. In order to further enhance the realism of the sur-
 gical training, the selection device 9 may be arranged to
 randomly select one of the local anatomic environments 2,
 as described above, whereby the random selection is such
 that the probability of selecting a certain local anat-
 25 omic environment essentially corresponds with the degree
 of occurrence of that local anatomic environment in human
 beings. This may for example be realised by means of pro-
 viding each local anatomic environment 2 of the library 3
 with a weight, corresponding to the occurrence of the
 30 biological variation being represented by the local anat-
 omic environment 2 in question.

As stated above, the 3-D model of the main virtual
 anatomic environment 1 and the 3-D model of the selected
 local anatomic environment 2 is transmitted to the total
 35 virtual anatomic environment modeller 14, in which the
 local anatomic environment 2 is positioned in its desired

position in the main virtual anatomic environment 1, together forming a total virtual anatomic environment.

The total anatomic environment, as modelled by the total anatomic environment modeller 14, is thereafter
5 transmitted to the interaction simulation device 13, in which the total anatomic environment is used for performing the simulation, and the interaction with the inputted movements and actions of the surgical tool. Thereafter, the simulation result is transmitted to and displayed by
10 the display device 12.

Many modifications, improvements and variations of the above described embodiments of the invention are obvious for the man skilled in the art, and such modifications, improvements and variations are intended to form a
15 part of the disclosure, and are also intended to fall within the scope and spirit of this invention as defined by the appended claims. Hence, the above description of preferred embodiments is only given by way of example, and the invention is only to be limited to what is stated
20 in the following claims, taking any equivalents into account.

For example, it shall be noted that the incorporation of the local virtual anatomic environment 2 into the main virtual anatomic environment may alternatively take
25 place directly in the interaction simulation device 13, hence excluding the total virtual anatomic environment modeller 14 as a separate component.

CLAIMS

1. A method for generating a virtual anatomic environment for use in minimally invasive surgery simulation, comprising the steps of:

5 -incorporating a main virtual anatomic environment (1),
-selecting a local anatomic environment (2) from a predefined library (3) comprising a set of two or more simulated local anatomic environments (2),
10 -including the selected local anatomic environment (2) in said main anatomic environment (1) to form a total virtual anatomic environment (4).

2. A method according to claim 1, wherein said set
15 of local anatomic environments (2) is arranged to represent a set of anatomic variations for a critical internal area, occurring in living beings.

3. A method according to claim 1 or 2, wherein the
20 step of selecting a local anatomic environment (2) from a predefined library (3) comprising two or more of simulated local anatomic environments (2) further comprises the step of randomly selecting one of the local anatomic environments (2) in the library (3).

25

4. A method according to claim 3, wherein the
probability of randomly selecting a certain local anatomic environment (2) essentially corresponds with the degree of occurrence of that local anatomic environment in
30 living beings.

5. A method according to any one of the preceding claims, wherein the main virtual anatomic environment (1) is arranged to model an internal cavity (5) of a human, such as an abdominal cavity or a chest cavity, while the
35 set of local anatomic environments is arranged to simulate different arrangements of arteries, veins and ducts

(7) around an organ (6) arranged in said internal cavity (5), such as a gall bladder or a heart.

6. A method according to any one of the claims 1-2 or 5, further comprising the step of:
-selecting, by means of user selection, a certain one of said local anatomic environments (2) from said library (3) and including it into said main virtual environment (1).

10

7. A device for generating a virtual anatomic environment for use in minimally invasive surgery simulation, comprising:
-a modelling device (15) for providing a main virtual anatomic environment (1),
-a library (3), comprising a set of two or more predefined local anatomic environments (2),
-means for incorporating one of the local anatomic environments (2) of the library (3) into the main virtual anatomic environment (1), together forming a total virtual anatomic environment (4).

8. A device according to claim 7, further comprising:
25 -a selection device (9) for selecting one of said local anatomic environments (2) from said library (3) to be included in said main anatomic environment.

9. A device according to claim 8, wherein:
30 -the selection device (9) is arranged to randomly select one of said local anatomic environments (2) from said library (3) to be included in said main anatomic environment.

35 10. A device according to claim 9, wherein:
-the selection device (9) is arranged to randomly select one of said local anatomic environments (2) in such a way

that the probability of selecting a certain local anatomic environment (2) essentially corresponds with the degree of occurrence of that local anatomic environment in human beings.

5

11. A device according to any one of the claims 7-10, wherein the main virtual anatomic environment (1) is arranged to model an internal cavity (5) of a human, such as an abdominal cavity or a chest cavity, while the set of local anatomic environments (2) is arranged to simulate different arrangements of arteries, veins and ducts (7) around an organ (6) arranged in said internal cavity (5), such as a gall bladder or a heart.

15 12. A computer-based minimal-invasive surgery simulation system, comprising a device for generating a virtual anatomic environment as described in any one of the claims 7-12.

0123456789

ABSTRACT

This invention relates to a method for generating a virtual anatomic environment for use in minimally invasive surgery simulation, comprising the steps of:

5 -incorporating a main virtual anatomic environment (1),
-selecting a local anatomic environment (2) from a predefined library (3) comprising a set of two or more simulated local anatomic environments (2),

10 -including the selected local anatomic environment (2) in said main anatomic environment (1) to form a total virtual anatomic environment (4).

The invention also relates to a device for generating a virtual anatomic environment for use in minimally invasive surgery simulation, as well as a computer-based minimal-invasive surgery simulation system comprising such a device.

15

Elected for publication: Fig 3

000330 H

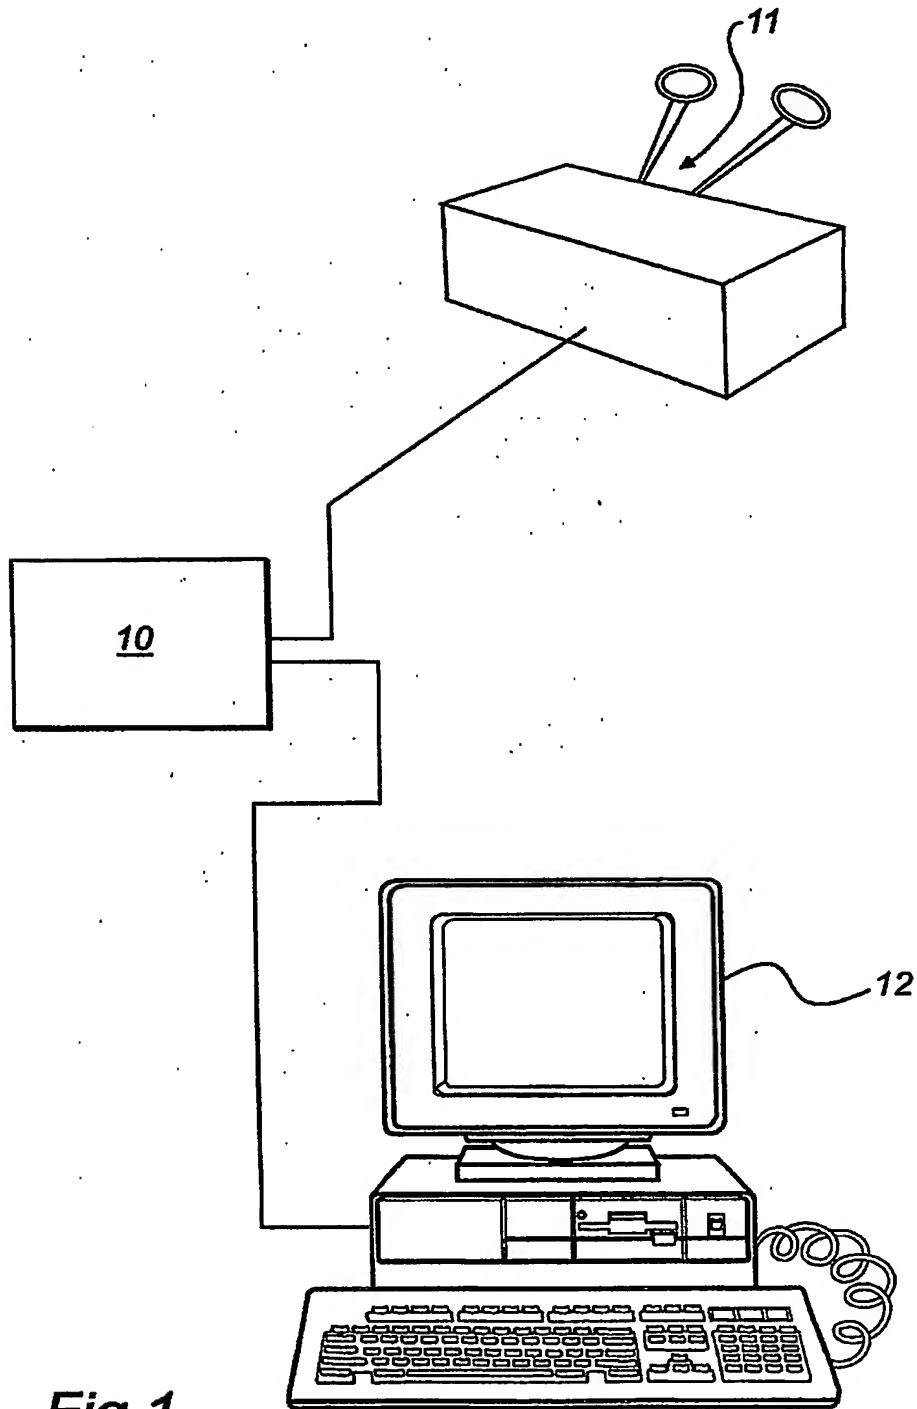


Fig.1

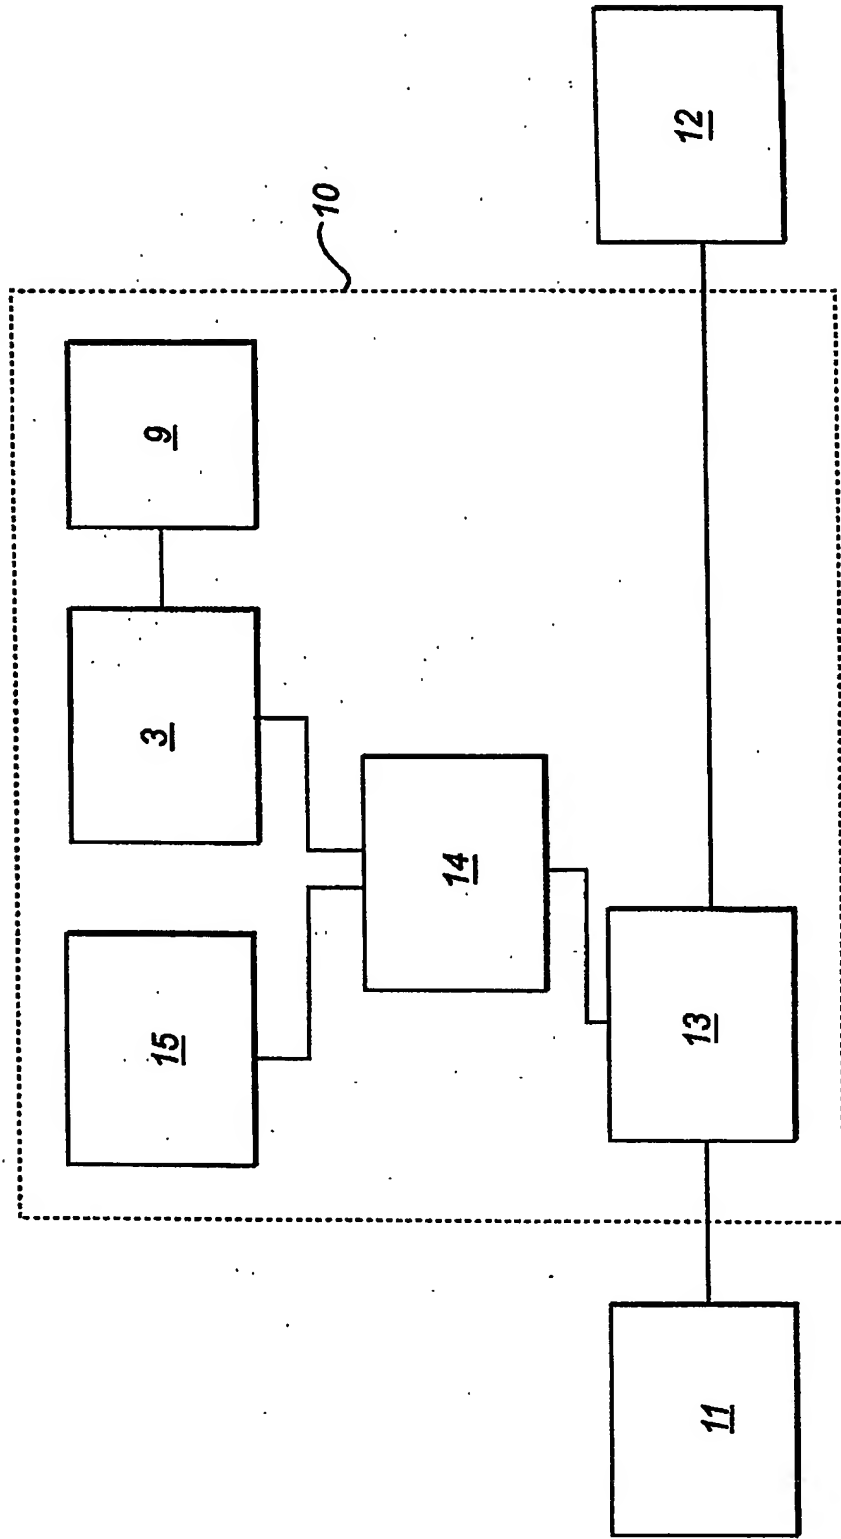


Fig. 2

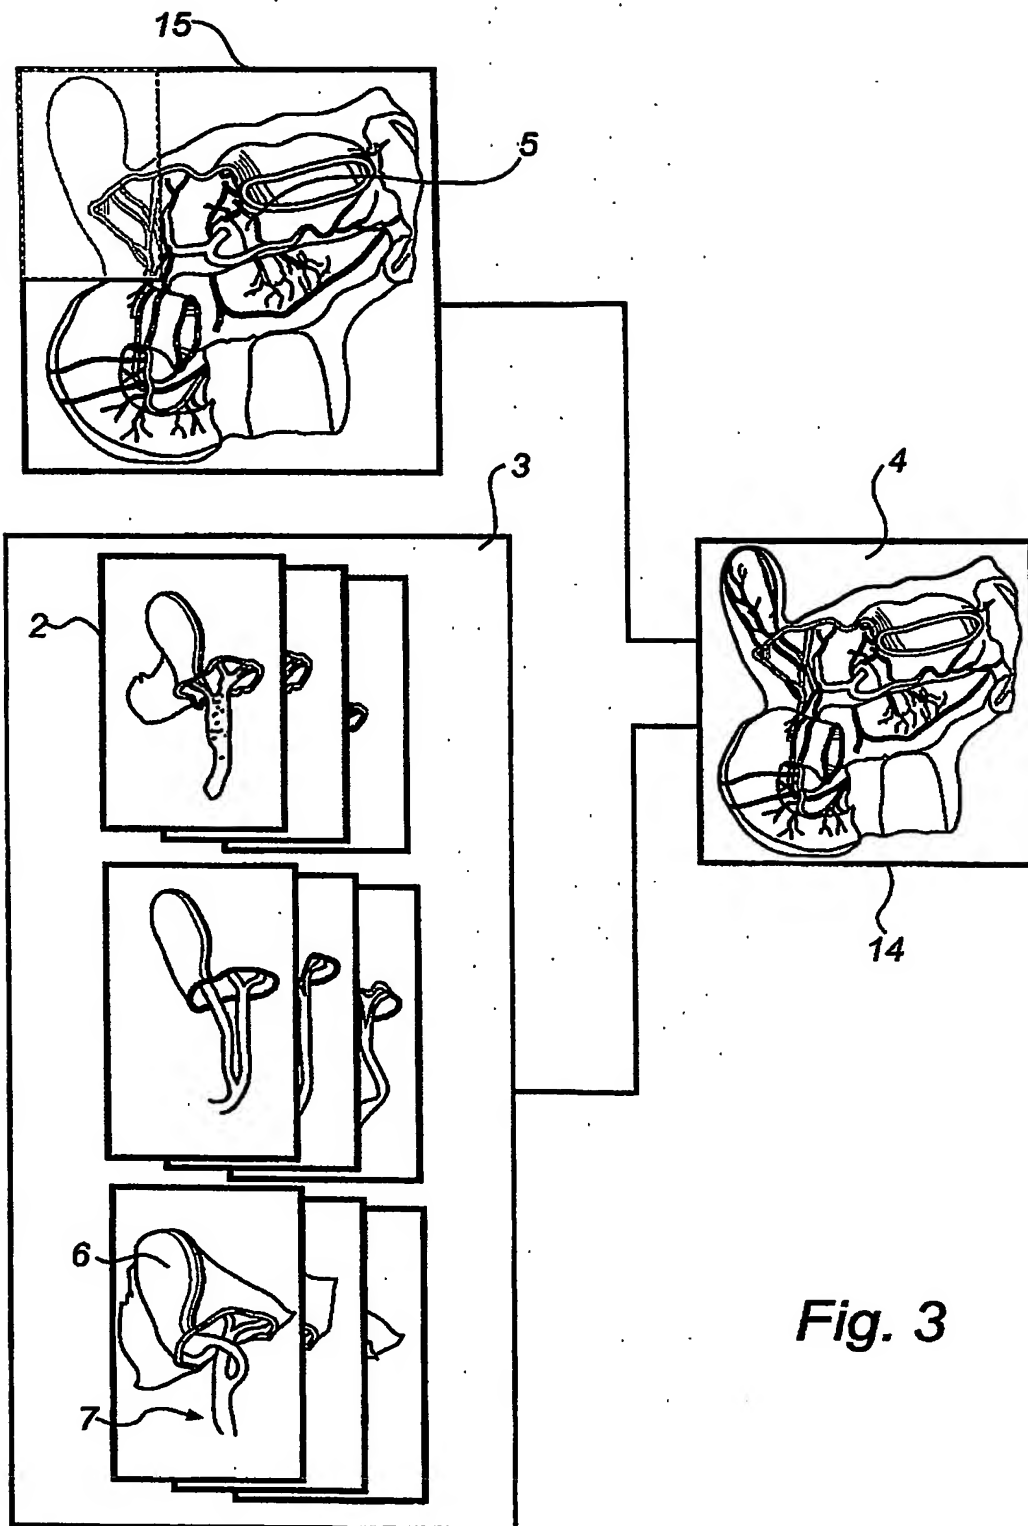


Fig. 3

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.